



Leaders in the electric heating and hot water industry

Innovative heating and hot water specialists, The Electric Heating Company, have developed their product portfolio to accommodate almost any Central Heating and Hot Water requirement.

From the comprehensive Comet Electric System
Boiler to the space saving SlimJim Electric Flow Boiler
our product knowledge and Technical assistance is
unrivalled in the Heating and Hot Water industry. Our
products have been designed with both the installer and
homeowner in mind and as such all the controls used
with our products are contemporary and user friendly.



We can supply a choice of Boiler Packs and our Electric Combination Boiler for a complete Heating & Hot Water installation. The Electric Boiler, Cylinder and Controls are all included within our exclusive packages. EHC are renowned for always putting the customer first and have won National Customer Service Awards in recognition of our efforts.



From initial enquiry to completed order we believe in focusing our attention on Customer Care.

The personnel at The Electric Heating Company are approachable, very experienced and committed to ensuring you have the best available options when choosing your products.

Our Products are specified on many Contracts throughout the UK and our customer base includes Social Landlords, Private Landlords, Developers, Homeowners and the general Heating Trade. In addition to our product catalogues our websites contain Installation & Technical Manuals, Energy Information and a host of relevant details relating to our products. You can also view our informative product videos from the website.

EHC offer an Accredited Heating Contractors scheme that operates throughout the UK. For more information call us on 01698 820533 for advice, brochures, technical information or alternatively visit our website at

www.electric-heatingcompany.co.uk

| FAQ's when installing | |
|--|-------|
| an Electric Boiler | 4-5 |
| Comet Combination Unit | 6-9 |
| Comet Electric Boiler | 10-11 |
| Comet Electric Boiler Direct Cylinder Packages | 12-13 |
| Comet Electric Boiler Indirect Cylinder Packages | 14-15 |
| Comet Electric Boiler Pre-Plumbed Indirect Cylinder Packages | 16-17 |
| Comet Boiler Schematics | 18-19 |
| Comet 3 Phase Electric Boiler | 20-21 |
| SlimJim Electric Boiler | 22-23 |
| SlimJim Electric Boiler Direct Cylinder Packages | 24-25 |
| SlimJim Electric Boiler Indirect Cylinder Packages | 26-27 |
| SlimJim Electric Boiler Pre-Plumbed Indirect | |
| Cylinder Packages | 28-29 |
| SlimJim Boiler Schematics | 30-31 |
| Accessories & Controls | 32-33 |
| Nentune Cylinders | 34-35 |

When Installing an Electric Boiler

- Electric Boilers are 100% efficient therefore there is no requirement to oversize the appliance
- If an efficient Direct Cylinder is present within the property install the Boiler for Heating only
- Heat Loss calculations should be made in accordance with the latest regulations
- Most 1, 2 & 3 bedroom properties are generally suitable for an Electric Boiler
- Properties with a high hot water demand are better suited to an Indirect Cylinder with an 'S' Plan configuration
- When installing an Electric Boiler always ensure that the incoming electrical supply is sufficient for the Boiler Output
- To accommodate "Off-Peak" electricity tariffs it is recommended that a Programmer with a facility for 3 On/Off periods is installed
- Electric Boilers are suitable for both Volt Free, Hard Wired and Wireless Thermostats and Controls
- If the property has an electric shower it is advisable that a Shower Flow Sensor or Relay Interrupt is installed to prevent the Electric Boiler and Electric Shower operating at the same time
- Electric Boilers require no mandatory annual maintenance
- Electric Boilers have no flue requirements
- EHC offer 3-Phase Electric Boilers that are suitable for light commercial purposes such as; offices, factory units, pubs, etc.

The Electric Boiler Specialists

- ★ Installation is quicker than a gas system
- ★ The wiring of an Electric Boiler is the same as an Electric Shower
- ★ Electric Boilers can be used for Open Vented Systems
- ★ Can be used as back-up for Heat Pumps
- ★ Standard radiators and valves can be used with Electric Boilers
- ★ EHC Electric Boilers have a soft start to avoid power surges
- ★ Electric Boilers are almost silent when operating
- ★ Electric Boilers emit no noxious fumes or gases
- ★ Can be used with underfloor heating systems
- ★ EHC only use and recommend High Efficiency ErP Smart Pumps



Comet Combination Unit

The Comet Electric Boiler Combination Unit offers the comfort and convenience of wet central heating and domestic hot water for domestic properties with no access to mains gas.

It is a fully controllable 24/7 packaged unit housed in an elegant enclosure and is available in 9kW, 12kW or 14.4kW Outputs with an internal 140 Litre Duplex Stainless Steel Hot Water Cylinder. The Boilers internal plumbing is configured to an 'S' Plan design that also has an in-built magnetic filter for added protection and includes pre-plumbed Expansion Vessels for both the Heating and Domestic Hot Water circuits.


Supplied with an external Tundish and Domestic Hot Water Control Valve and a fully programmable Controller and Wireless Room Thermostat to provide full control of both the Central Heating and Domestic Hot Water.

Latest Features Include

- ErP Hot Water Control
- Weather Compensation
- Tank Cleansing Feature (Anti Legionella)
- Optional Solar DHW PV Connection
- Wireless Thermostat

Boiler 2 year guarantee

Stainless Steel Cylinder 10 year guarantee

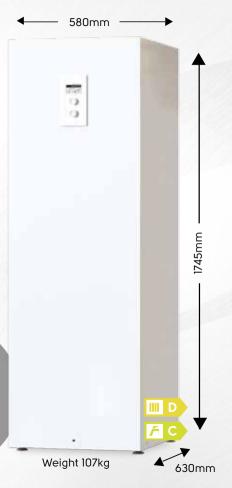

The Boilers inbuilt controller "Navigation Button" gives you easy access to the boilers settings by simply scrolling through the menu. There are various pre-set times that can be easily adjusted to suit your heating & domestic hot water requirements. For ease of installation a Wireless Room Thermostat is supplied which can be located anywhere within the property.


The unit has In-built Weather Compensation which will automatically modulate and reduce the Boilers input temperature in relation to the external temperature which reduces Boiler cycling and could save up to 15% energy usage. A further energy saving measure would be to add our optional Titanium PV Immersion heater to the Cylinder which when connected to a Solar PV diverter will automatically start heating the cylinder within the unit.

Comet Combination Unit Features

- Full Power Modulation
- Stainless Steel Heat Exchanger with Automatic Air Vent
- O Digital Pressure Gauge
- In Built Weather Compensation
- Wireless Thermostat Included
- ErP Smart Pump
- Magnetic Filter

Stainless Steel Cylinder & System Features

- O DHW & HTG Zone Valves
- O Drain Point
- Optional Immersion Heater or Solar PV Heater
- Inbuilt Programmer

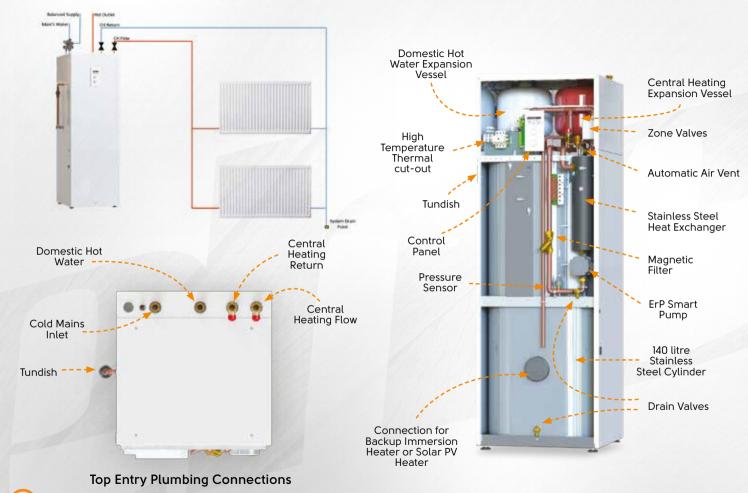



Comet Combination Unit Technical Information

| | | 9kW | 12kW | 14.4kW |
|--|-----|--------|-----------------------------|---------|
| Electrical supply | | | 240V - 50Hz | |
| Load current | Amp | 38 | 50 | 60 |
| Minimum permitted Cable diameter | mm² | 10 | 16 | 16 |
| Circuit protection | Amp | 50 | 63 | 80 |
| Primary system pressure relief valve setting | Bar | | 3.0 | |
| Primary system operating pressure (min) | Bar | | 1.0 | |
| Thermal cut-out | °C | | 100 | |
| Expansion vessel | | Ca | pacity 12L - pre-charged 1. | 5 Bar |
| Outlet flow temperature | °C | | 30 to 85 | |
| Primary circulating pump | | Grun | dfos UPM3 or Wilo-Para 15, | /7 iPWM |
| Safety valve | Bar | | Opening pressure: 3 Bar | - |
| Hydraulic connections | | | 22mm | |
| 17° to 55° Hot Water Recovery Time | | 44mins | 36mins | 29mins |
| 17° to 65° Hot Water Recovery Time | | 72mins | 56mins | 45mins |
| Heating output | BTU | 30709 | 40945 | 49134 |
| Space heating ERP | | | D | |

| | CYLINDER | DETAILS |
|---|----------|---------------------------|
| Maximum water supply pressure | Bar | 10 |
| Cylinder operating pressure (secondary) | Bar | 3 |
| Cylinder operating pressure (primary max) | Bar | 2.5 |
| Cylinder operating pressure (secondary max) | Bar | 5.5 |
| Expansion relief valve setting (secondary) | Bar | 6 |
| Thermostat | °C | 30 to 70 |
| Tank capacity | ltr | 140 |
| Temperature-pressure valve | | 95°C/6Bar TP 152 - 1/2 |
| Expansion vessel | 12ltr | 3 Bar (charge pressure) |
| Hydraulic connections | | Copper pipe ø 22 x 1 |
| Optional immersion heater | 3000w | 240volt |
| Net Weight | kg | 106.8 |
| Gross Weight | kg | 246 |
| Dimensions | mm | 1745(h) x 580(w) x 630(d) |
| Cylinder ERP | | С |
| | | |

Fusion Comet Electric Boiler

Comet Electric System Boilers are designed to eliminate unnecessary external plumbing and pipe work.

They are the ideal choice for wet central heating and underfloor heating systems. It has been engineered to include the pump, auto-air vent, expansion vessel, auto-bypass and expansion vessel within the compact casing. For added safety the Boiler also incorporates a High Temperature Thermal cutout for added protection.

Our single phase Boiler outputs are 6kW, 9kW, I2kW with the I4.4kW available for properties that require larger outputs.

To ensure maximum efficiency, all Comet Boilers incorporate six stage heating using a stainless steel heat exchanger. This unique facility will modulate the Boiler to reduce electricity consumption and running costs.

The easy-to-use control panel provides operating temperatures for flow and return, system flow rate and kW output information and enables the installer to utilise the inbuilt self-diagnostic feature during installation or routine maintenance.

The operating temperature of the Boiler can be adjusted from 20 degrees through to a maximum 85 degrees.

In light commercial properties with a 3-Phase electricity supply, we supply 23kW and 39kW output Boilers. For multiple Boiler installations it is also possible to install them in series to suit non domestic situations (see page 20).



Boiler Features

- Outputs from 6kW to 14.4kW
- Integral sealed system kit
- Virtually silent in operation
- Suitable for central heating only or central heating & hot water
- Can be used for underfloor heating
- No Mandatory Maintenance required
- 100% efficient
- Stainless Steel Heat Exchanger
- 2 years Parts & Labour Guarantee
- Removable bottom tray

Electronic Features

- Volt-free Control Connections
- 6 Stage Heating
- Integral System Diagnostics
- Easy-Fit Connectors & Sensors
- In-Built Fault Finding Diagnostics
- High Temperature Thermal Cut-Out
- Vortex Flow Temperature Sensor
- Digital Pressure Gauge

Accessories

| Code | Description |
|----------|---------------------------------------|
| EC10001 | Single Channel Programmer |
| EC10002 | Twin Channel Programmer |
| EC10012 | Room Thermostat |
| EC10011 | 'S' Plan Twin Channel Heat Pack |
| E10SS/7 | Supreme Saver Hot Water Programmer |
| ESFS15/C | Shower Flow Sensor |
| | |

| Boiler Range | kW | 6kW | 9kW | 12kW | 14.4kW |
|---|------|-------|---------------------|---------------|--------|
| Pipe entry from Boilers | | | Bottor | m Entry | |
| Flow & Return Pipes | mm | | 2 | 22 | |
| Min/Max Water Pressure | Bar | | 0.5 | /3.0 | |
| Expansion Vessel | Ltrs | | 6 | 0.0 | |
| Dry Weight | Kgs | | 2 | 25 | |
| Electricity Supply | VAC | | 240V 1 ₁ | oh 50Hz | |
| Load/Current | Amp | 25 | 38 | 50 | 60 |
| Heating output | Btu | 20472 | 30709 | 40945 | 49134 |
| Min/Max Temp Settings | °C | | 20 | /85 | |
| Overheat Protection | °C | | 10 | 00 | |
| Pump included | | | Y | es | |
| Recommended Pump Settings | | Fac | tory Set to N | Max (adjustat | ole) |
| Recommended Diameter of Mains Cable | mm | 6 | 10 | 16 | 16 |
| Protection | Amp | 32 | 50 | 63 | 80 |
| ErP Rating | | D | D | D | D |



Fusion Comet Electric Boiler

Direct Cylinder Packages

The Fusion Comet Electric Boiler is a sleek modern fully controllable system Boiler

- Outputs from 9kW to 14.4kW

- Boiler provides central heating only and domestic hot water is provided by the direct unvented cylinder

- Parts & Labour Guarantee
- No flue required



Our one stop shop service enables us to provide Comet Electric Boiler and Cylinder packages with associated controls. This service ensures that all your heating and hot water appliances carry the EHC Brand and simplifies your future warranty support

| Code | Description | Number of Bedrooms |
|--------------|-------------------------------|--------------------|
| EHCCOM9/150 | 9kw Boiler / 150l Cylinder | 1 or 2 |
| EHCCOM9/180 | 9kw Boiler / 180l Cylinder | 2 |
| EHCCOM12/150 | 12kw Boiler / 150l Cylinder | 3 |
| EHCCOM12/180 | 12kw Boiler / 180l Cylinder | 3 |
| EHCCOM12/210 | 12kw Boiler / 210l Cylinder | 3 or 4 |
| EHCCOM15/150 | 14.4kw Boiler / 150l Cylinder | 3 |
| EHCCOM15/180 | 14.4kw Boiler / 180l Cylinder | 3 |
| EHCCOM15/210 | 14.4kw Boiler / 210l Cylinder | 3 or 4 |

What's Included

| | 2 Year Warranty |
|--|------------------|
| ⊙ Choice of Direct Unvented Stainless Steel Cylinder | 25 Year Warranty |
| Single Channel Programmer ■ | 2 Year Warranty |
| | 2 Year Warranty |
| | 2 Year Warranty |



Fusion Comet Electric Boiler

Indirect Cylinder Packages

Like all EHC Boilers, the Fusion Comet Electric Boiler has been designed to eliminate unnecessary external plumbing, pipe work and ease of installation

- Outputs from 9kW to 14.4kW
- Integral sealed system kit
- Virtually silent in operation
- Can provide central heating & hot water with our Twin Channel Heat Pack
- Can be used for underfloor heating

- Parts & Labour Guarantee
- No flue required



| Code | Description | Number of Bedrooms |
|-----------------|-------------------------------|--------------------|
| EHCCOM9/150IND | 9kw Boiler / 150l Cylinder | 1 or 2 |
| EHCCOM9/180IND | 9kw Boiler / 180l Cylinder | 2 |
| EHCCOM12/150IND | 12kw Boiler / 150l Cylinder | 3 |
| EHCCOM12/180IND | 12kw Boiler / 180l Cylinder | 3 |
| EHCCOM12/210IND | 12kw Boiler / 210l Cylinder | 3 |
| EHCCOM15/150IND | 14.4kw Boiler / 150l Cylinder | 3 or 4 |
| EHCCOM15/180IND | 14.4kw Boiler / 180l Cylinder | 3 or 4 |
| EHCCOM15/210IND | 14.4kw Boiler / 210l Cylinder | 3 or 4 |

What's Included

| | 2 Year Warranty |
|---------------------------|------------------|
| | 25 Year Warranty |
| ⊙ Twin Channel Programmer | 2 Year Warranty |
| | 2 Year Warranty |





Install



High Quality



Energy Efficient



Great Performance



Virtually Silent



Best Price

Fusion Comet Electric Boiler

Pre-Plumbed / Pre-Wired Indirect Cylinder Packages

With the sleek design and integral pipework the Boiler can be discreetly located in either a cupboard or wall mounted e.g. in the kitchen area

- Outputs from 9kW to 14.4kW
- ∀irtually silent in operation
- Provides central heating & hot water via the 'S' plan configuration

- Parts & Labour Guarantee
- No flue required



| Code | Description | Number of Bedrooms |
|-----------------|-----------------------------|--------------------|
| EHCCOM9/150PPC | 9kw Boiler / 150l Cylinder | 1 or 2 |
| EHCCOM9/180PPC | 9kw Boiler / 180l Cylinder | 2 |
| EHCCOM12/150PPC | 12kw Boiler / 150l Cylinder | 3 |

12kw Boiler / 180l Cylinder

12kw Boiler / 210l Cylinder

14.4kw Boiler / 150l Cylinder

14.4kw Boiler / 180l Cylinder

14.4kw Boiler / 210l Cylinder

3

3 3 or 4

3 or 4

3 or 4

What's Included

EHCCOM12/180PPC

EHCCOM12/210PPC

EHCCOM15/150PPC

EHCCOM15/180PPC

EHCCOM15/210PPC

| ⊙ Choice of Comet Boiler | 2 Year Warranty |
|----------------------------|------------------|
| | 25 Year Warranty |
| | 2 Year Warranty |
| | 2 Year Warranty |
| ② 2 Port Zone Valve (x2) | 2 Year Warranty |
| ⊙ Dual Cylinder Thermostat | 2 Year Warranty |
| | 2 Year Warranty |
| | 2 Year Warranty |
| | |






Heating and Hot Water design with Indirect
Cylinder

Heating and Hot Water
design with Pre-plumbed
Indirect Cylinder

Note:- The above schematics are for illustration purposes only. Consult your engineer for your requirements.

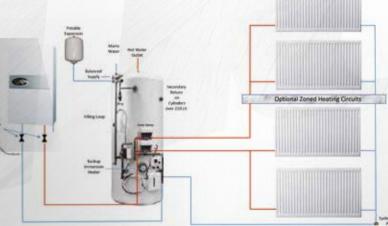

3 Phase Fusion Comet Electric Boiler

The perfect solution for a wet central heating system in light commercial properties, hotels, guest houses and large properties with 3 Phase electricity.

Our fully modulating, powerful 3 Phase Electric Boilers have been engineered to include a 6 Stage Heat Exchanger, Automatic Air Vents, Grundfos Smart Multifunction Pump, Pressure Sensor, Flow & Return Temperature Sensors and High Temperature Safety Cut-Out.

Our 3 Phase boiler outputs are 12kW, 14.4kW, 23kW and 39kW.

To ensure maximum efficiency, all Comet Boilers incorporate six stage heating using a heat exchanger. This unique facility will modulate the boiler to reduce electricity consumption and running costs.

The operating temperature of the boiler can be adjusted from 20 degrees through to a maximum 85 degrees.



Boiler Features

- Outputs from 12kW to 39kW
- Integral sealed system kit
- Virtually silent in operation
- Suitable for central heating only or central heating & hot water
- Can be used for underfloor heating
- No Mandatory Maintenance required
- 100% efficient
- Stainless Steel or Copper Heat Exchanger
- 2 years Parts & Labour Guarantee
- Removable bottom tray

Electronic Features

- Volt-free Control Connections
- 6 Stage Heating
- Integral System Diagnostics
- Easy-Fit Connectors & Sensors
- In-Built Fault Finding Diagnostics
- High Temperature Thermal Cut-Out
- Smart Multifunction Pump
- Vortex Flow Temperature Sensor
- Digital Pressure Gauge

Accessories

| Accessories | |
|-------------|---------------------------------------|
| Code | Description |
| EC10001 | Single Channel Programmer |
| EC10002 | Twin Channel Programmer |
| EC10012 | Room Thermostat |
| EC10011 | 'S' Plan Twin Channel Heat Pack |
| E10SS/7 | Supreme Saver Hot Water Programmer |
| ESFS15/C | Shower Flow Sensor |
| | |

The easy-to-use control panel provides operating temperatures for flow and return, system flow rate and kW output information and enables the installer to utilise the inbuilt self-diagnostic feature during installation or routine maintenance.

Using conventional wet system radiators and valves the Boilers can be installed in any property type with 3-Phase Electricity to offer an effective and efficient heating solution. For larger output requirements, these boilers can be combined on a low loss header to increase the overall output which gives endless install solutions.

| Boiler Range | kW | 12kW | 14.4kW | 23kW | 39kW | |
|--|------|--------------|---------------|--------------|--------|--|
| Pipe Entry from Boilers | | Bottom Entry | | | | |
| Flow & Return Pipes | mm | | 2 | 2 | | |
| Min/Max Water Pressure | Bar | | 0.5 | /3.0 | | |
| Expansion Vessel | Ltrs | | , | 6 | | |
| Heat Exchanger | | Stainless | Stainless | Copper | Copper | |
| Dry Weight | Kgs | | 2 | :5 | | |
| Electricity Supply | V | | 415V 3p | oh 50Hz | | |
| Load/Current | Amp | 3x17 | 3x20 | 3x31 | 3x54 | |
| Heating Output | Btu | 40945 | 49134 | 77114 | 132045 | |
| Min/Max Temp Settings | °C | 20/85 | 20/85 | 20/85 | 20/85 | |
| Overheat Protection | °C | | 10 | 00 | | |
| Pump Included | | | Y | es | | |
| Recommended Pump Settings | | Fac | tory set to N | 1ax (Adjusta | ole) | |
| Recommended Diameter of Mains Cable | mm² | 5x2.5 | 5x4 | 5x6 | 5x10 | |
| Protection | Amp | 3X20 | 3X32 | 3X40 | 3X63 | |
| Erp Rating | | | 1 |) | | |

SlimJim Electric Boiler The multi-purpose Boiler where space is at a premium.

The compact design of the boiler makes it ideal for heating applications where space is at a premium. The SlimJim is traditionally installed by professional heating engineers in properties such as apartments, domestic dwellings, holiday homes and light commercial properties. Our single phase Boiler outputs are 4kW, 7kW, 10kW, 12kW with the I4.4kW available for properties that require larger outputs.



The SlimJim is a fully controllable Electric Flow Boiler which is 100% efficient and designed to maximise cupboard space. The Boiler also has an easy-fit front cover for future maintenance purposes. It has a user-friendly Front Control Panel incorporating heat mode and fault finding indicators and easy-to-use temperature control setting. The stainless steel Heat Exchanger is fully insulated to minimise heatloss.



Weight 11kg

The Boiler temperature range can be set between 30 degrees and 80 degrees which also makes it a suitable choice for wet system and underfloor heating applications.

Safety is of paramount importance and as such the SlimJim Boiler incorporates a unique high temperature safety cut-out device to protect the boiler.

The SlimJim can be supplied as a Boiler only or complete with a choice of Heat Packs.

Boiler Features

- Outputs from 4kW to 14.4kW
- Virtually silent in operation
- Suitable for central heating only or central heating & hot water
- Can be used for underfloor heating
- No Mandatory Maintenance required
- 100% efficient
- Stainless Steel Heat Exchanger
- 2 years Parts & Labour Guarantee
- Removable bottom tray

Electronic Features

- Volt-free Control Connections
- 6 Stage Heating
- Integral System Diagnostics
- Easy-Fit Connectors & Sensors
- In-Built Fault Finding Diagnostics
- High Temperature Thermal Cut-Out
- Digital Pressure Gauge

Accessories

| Code | Description |
|----------|---------------------------------------|
| EC10001 | Single Channel Programmer |
| EC10002 | Twin Channel Programmer |
| EC10012 | Room Thermostat |
| EC10011 | 'S' Plan Twin Channel Heat Pack |
| E10SS/7 | Supreme Saver Hot Water Programmer |
| ESFS15/C | Shower Flow Sensor |
| | |

| Boiler Range | kW | 4kW | 7kW | 10kW | 12kW | 14.4kW |
|--|-----|-------|-------|------------|-------|--------|
| Pipe entry boiler - flow | | | | Тор | | |
| Pipe entry boiler - return | | | | Bottom | | |
| Central heating flow & return pipes | mm | | | 22 | | |
| Max Pressure | Bar | | | 3.0 | | |
| Min Pressure | Bar | | | 0.5 | | |
| Min/Max Temp Settings | °C | | | 30/80 | | |
| Overheat Protection | °C | | | 100 | | |
| Safety class | | | | IP22 | | |
| Electrical Supply | VAC | | 24 | 40V 1ph 50 | Hz | |
| Load current | Amp | 17 | 29 | 42 | 50 | 60 |
| Recommended diameter of mains cable | mm | 6 | 10 | 10 | 16 | 16 |
| Heating output | Btu | 13648 | 23884 | 34121 | 40945 | 49134 |
| Protection | Amp | 20 | 40 | 50 | 63 | 80 |
| Erp Rating | | | | D | | |
| Dry Weight | Kgs | | | 11 | | |



SlimJim Electric Boiler

Direct Cylinder Packages

The compact design of the SlimJim Electric Flow Boiler makes it ideal for heating applications where space is at a premium.

- Outputs from 4kW to 14.4kW
- Virtually silent in operation
- Boiler provides central heating only & domestic hot water is provided by the direct unvented cylinder
- Ocan be used for underfloor heating
- 100% efficient
- Includes Run Dry Sensor
- No flue required



Our one stop shop service enables us to provide SlimJim Electric Boiler and Cylinder packages with associated controls. This service ensures that all your heating and hot water appliances carry the EHC Brand and simplifies your future warranty support

| | | 43. Thirtie |
|----------------------------|-------------------------------|--------------------|
| Code | Description | Number of Bedrooms |
| EHCSJ7/120 | 7kw Boiler / 120l Cylinder | 1 |
| EHCSJ10/120 | 10kw Boiler / 120l Cylinder | 1 or 2 |
| EHCSJ10/150 | 10kw Boiler / 150l Cylinder | 1 or 2 |
| EHCSJ10/180 | 10kw Boiler / 180l Cylinder | 2 |
| EHCSJ12/150 | 12kw Boiler / 150l Cylinder | 3 |
| EHCSJ12/180 | 12kw Boiler / 180l Cylinder | 3 |
| EHCSJ15/150 | 14.4kw Boiler / 150l Cylinder | 3 |
| EHCSJ15/180 | 14.4kw Boiler / 180l Cylinder | 3/4 |
| What's Included | | |
| ⊘ Choice of SlimJim Boiler | | 2 Year Warranty |

| ⊙ Choice of SlimJim Boiler | 2 Year Warranty |
|-------------------------------|------------------|
| | 25 Year Warranty |
| | 2 Year Warranty |
| | 2 Year Warranty |
| ⊗ 8 Litre Robo Kit | 2 Year Warranty |
| | 2 Year Warranty |
| → High Quality ErP Smart Pump | 2 Year Warranty |
| | 2 Year Warranty |
| | 2 Year Warranty |





Space Saver



High Quality



Energy Efficient



Great Performance



Virtually Silent



Best Price

SlimJim Electric Boiler

Indirect Cylinder Packages

The SlimJim is traditionally installed by professional heating engineers in properties such as domestic dwellings, holiday homes and light commercial properties

- Outputs from 4kW to 14.4kW
- Virtually silent in operation
- Can provide central heating & hot water using our Boiler Heat Packs

- Includes Run Dry Sensor
- No flue required
- No fumes and no risk of explosion



| Code | Description | Number of Bedrooms |
|----------------------------|-------------------------------|--------------------|
| EHCSJ7/120 | 7kw Boiler / 120l Cylinder | 1 |
| EHCSJ10/120 | 10kw Boiler / 120l Cylinder | 1 or 2 |
| EHCSJ10/150 | 10kw Boiler / 150l Cylinder | 1 or 2 |
| EHCSJ10/180 | 10kw Boiler / 180l Cylinder | 2 |
| EHCSJ12/150 | 12kw Boiler / 150l Cylinder | 3 |
| EHCSJ12/180 | 12kw Boiler / 180l Cylinder | 3 |
| EHCSJ15/150 | 14.4kw Boiler / 150l Cylinder | 3 |
| EHCSJ15/180 | 14.4kw Boiler / 180l Cylinder | 3/4 |
| What's Included | | |
| | | 2 Year Warranty |
| | Stainless Steel Cylinder | 25 Year Warranty |
| | er | 2 Year Warranty |
| | | 2 Year Warranty |
| ⊗ 8 Litre Robo Kit | | 2 Year Warranty |
| | | 2 Year Warranty |
| | np | 2 Year Warranty |
| | | 2 Year Warranty |
| | | 2 Year Warranty |
| | | 2 Year Warranty |
| ⊘ 2 Port Zone Valve (x2) | | 2 Year Warranty |
| | | 2 Year Warranty |
| O Dual Cylinder Thermostat | | 2 Year Warranty |





Time Saver Install



Space Saver



High Quality



Energy Efficient



Great Performance



Virtually Silent



Best Price

SlimJim Electric Boiler

Pre-Plumbed / Pre-Wired Indirect
Cylinder Packages

The SlimJim is ideal for wet system and underfloor heating applications

- Outputs from 4kW to 14.4kW
- Virtually silent in operation
- Provides central heating & hot water via the 'S' plan configuration
- Ocan be used for underfloor heating

- No flue required



| Code | Description | Number of Bedrooms |
|-----------------------------|--|--------------------|
| | Description 7.100 LG High | |
| EHCSJ7/120 | 7kw Boiler / 120l Cylinder | 1 |
| EHCSJ10/120 | 10kw Boiler / 120l Cylinder | 1 or 2 |
| EHCSJ10/150 | 10kw Boiler / 150l Cylinder | 1 or 2 |
| EHCSJ10/180 EHCSJ12/150 | 10kw Boiler / 180l Cylinder | 2 |
| EHCSJ12/180 | 12kw Boiler / 150l Cylinder 12kw Boiler / 180l Cylinder | 3 |
| EHCSJ15/150 | 14.4kw Boiler / 150l Cylinder | 3 |
| EHCSJ15/180 | 14.4kw Boiler / 180l Cylinder | 3/4 |
| Vhat's Included | | |
| Choice of SlimJim Boiler | | 2 Year Warranty |
| Choice of Indirect Unvented | Stainless Steel Cylinder | 25 Year Warranty |
| Twin Channel Programmer | | 2 Year Warranty |
| Room Thermostat | | 2 Year Warranty |
| 8 Litre Robo Kit | | 2 Year Warranty |
| Auto Air Vent | | 2 Year Warranty |
| High Quality ErP Smart Pum | p | 2 Year Warranty |
| Lockshield Valves | | 2 Year Warranty |
| Magnetic Filter | | 2 Year Warranty |
| Automatic By-Pass | | 2 Year Warranty |

② 2 Port Zone Valve (x2)


Dual Cylinder Thermostat


Wiring Centre



2 Year Warranty

2 Year Warranty

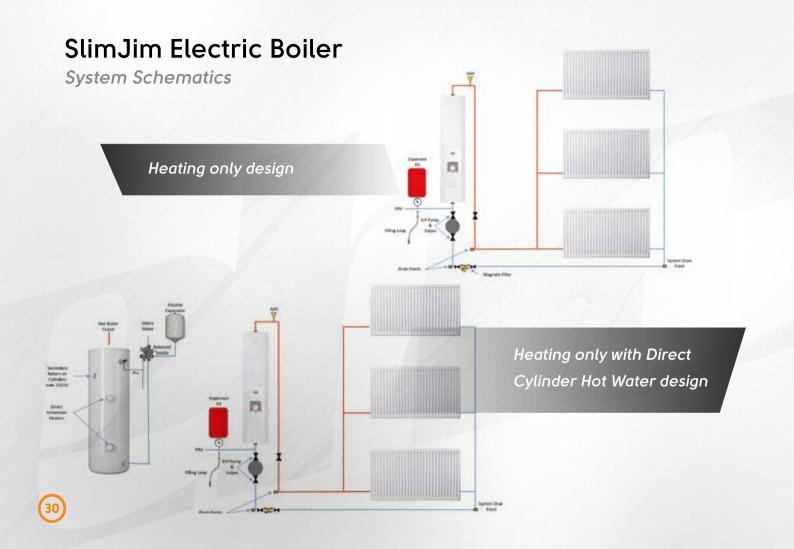


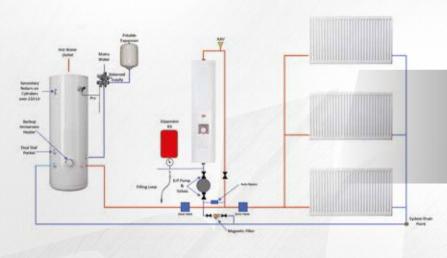

Heating and Hot Water design with Indirect Cylinder

Heating and Hot Water design with Pre-plumbed Indirect Cylinder

Note:- The above schematics are for illustration purposes only. Consult your engineer for your requirements.

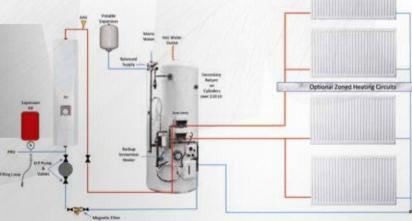

Accessories & Controls

EC10001 -Single Channel Programmer



- Selection of Modes -
- ② 2 or 3 ON/OFF Selector
- Preset program settings
- **Standard Back Plate**
- Suitable for Wired Installations or used in conjunction with EC10015 RF Thermostat.

EC10002 -Twin Channel Programmer



- ⊗ Selection of Modes -
- Ø 2 or 3 ON/OFF Selector
- Preset program settings
- Suitable for Wired Installations or used in conjunction with EC10015 RF Thermostat.

EC10003 -Three Channel Programmer



- Selection of Modes 24 Hours, 5/2 Day & 7 Day
- Ø 2 or 3 ON/OFF Selector

- Suitable for Wired Installations or used in conjunction with EC10015 RF Thermostat.



EC10012 -Room Thermostat

- Hard Wired
- O Diaphragm Temperature Sensor
- Ideal for Surface or Pattress Box mounting





EC10015 -EHC Wireless Room Thermostat

- Wireless Communication
- 230V or Volt Free Switching capability

- Simple Control Dial with sizeable Digital Screen
- Quick easy installation



EC10011 -Twin Channel Heatpack

- Room Thermostat
- Oylinder Thermostat
- Wiring Centre



EC10006 -Grundfox UPM3 or Wilo Pump

- High Efficiency ErP Compliant.
- Speed-controlled, highefficiency Pump fitted with electronically commutated motor (ECM)
- Uses 85% less Electricity compared to standard Pumps



EC10007 -Pump Value

- 22mm Compression lockshield Valve
- Supplied with Pump Washer



EC10005 -Auto Air Vent

- Suitable for Vented & Sealed Systems



M0235 -Magnetic Filter

- In-line Filter with Strainer and Magnetic stack



ESFS15C -Shower Flow Sensor

- 15mm Compression Fittings
- Auto Shutdown of the Boiler when the Shower is running
- Normally open & normally closed connections supplied

Stainless Steel Cylinders

Direct Unvented

25 Year Warranty

The following fittings are supplied with our Direct Cylinders:

- Installation & Maintenance Instructions
- Benchmark Logbook

| Model No. | CAPACITY (Litres) | HEIGHT (mm) | DIAMETER (mm) | WEIGHT (Kg-EMPTY) | WEIGHT (Kg-FULL) | RATING |
|-----------|----------------------|----------------|---------------|----------------------|---------------------|--------|
| NDIR125L | 120 | 933 | 550 | 25 | 149 | В |
| NDIR150L | 150 | 1120 | 550 | 30 | 185 | С |
| NDIR180L | 180 | 1308 | 550 | 33 | 218 | С |
| NDIR210L | 210 | 1496 | 550 | 37 | 253 | С |
| NDIR250L | 250 | 1746 | 550 | 40 | 296 | С |





Stainless Steel Cylinders

Indirect Unvented

25 Year Warranty

The following fittings are supplied with our Indirect Cylinders:

- Expansion Vessel c/w Wall Mounting Bracket
- 2 1 x 3kW Immersion Heater On Cylinders 210L & Smaller

- 2 x 3kW Immersion Heaters -On Cylinders 250L & Greater
- Oual Thermostat
- Installation & Maintenance Instructions
- Benchmark Logbook

| Model No. | CAPACITY (Litres) | HEIGHT (mm) | DIAMETER (mm) | WEIGHT (Kg-EMPTY) | WEIGHT (Kg-FULL) | RATING |
|-----------|-------------------|----------------|---------------|----------------------|---------------------|--------|
| NIND125L | 120 | 933 | 550 | 25 | 149 | В |
| NIND150L | 150 | 1120 | 550 | 30 | 185 | С |
| NIND180L | 180 | 1308 | 550 | 33 | 218 | С |
| NIND210L | 210 | 1496 | 550 | 37 | 253 | С |
| NIND250L | 250 | 1746 | 550 | 40 | 296 | С |

Note: Slimline Direct & Indirect models available (478mm in Diameter)







The Electric Heating Company delivers premier heating products across the UK

Tel: 01698 820533

Email: info@electric-heatingcompany.co.uk

www.electric-heatingcompany.co.uk

Unit 40, Block 5, Third Road, Blantyre Industrial Estate, Blantyre, Glasgow G72 0UP



