



ELECTRIC SYSTEM BOILER












with optional Solar PV Integration

Multi-output boiler, configurable on site

NEW FOR
2024



The CometPV system boiler can be integrated with SolarPV if required, but the boiler can also work as a standard electric system boiler.


-  PV Integration (optional)
-  Zero Carbon
-  Energy Monitoring
-  Weather Compensation
-  Automatic Anti-Legionella Feature
-  Adjustable Flow Temperature: 20°C – 85°C
-  Smart boiler control using the EHC App*
-  Capable of working on multiple heating circuits simultaneously, each operating at different temperatures
-  Available in outputs from 2kw to 24kw, Which can be adjusted on-site to achieve optimal performance
-  Maximising energy brought from your solar panels. Minimising excess energy going back to the grid
-  **Multiple outputs. Configurable on-site. With 3 models available:**
Model 1: 2, 4, 6, 8kW
Model 2: 7.2, 9.6, 12, 14.4kW
Model 3: 12, 16, 20, 24kW

*EHC C.MI2 Internet Module Required

5 YEARS WARRANTY*


*T&C's Apply See Website.

CometPV Electric System Boiler Internal Diagram

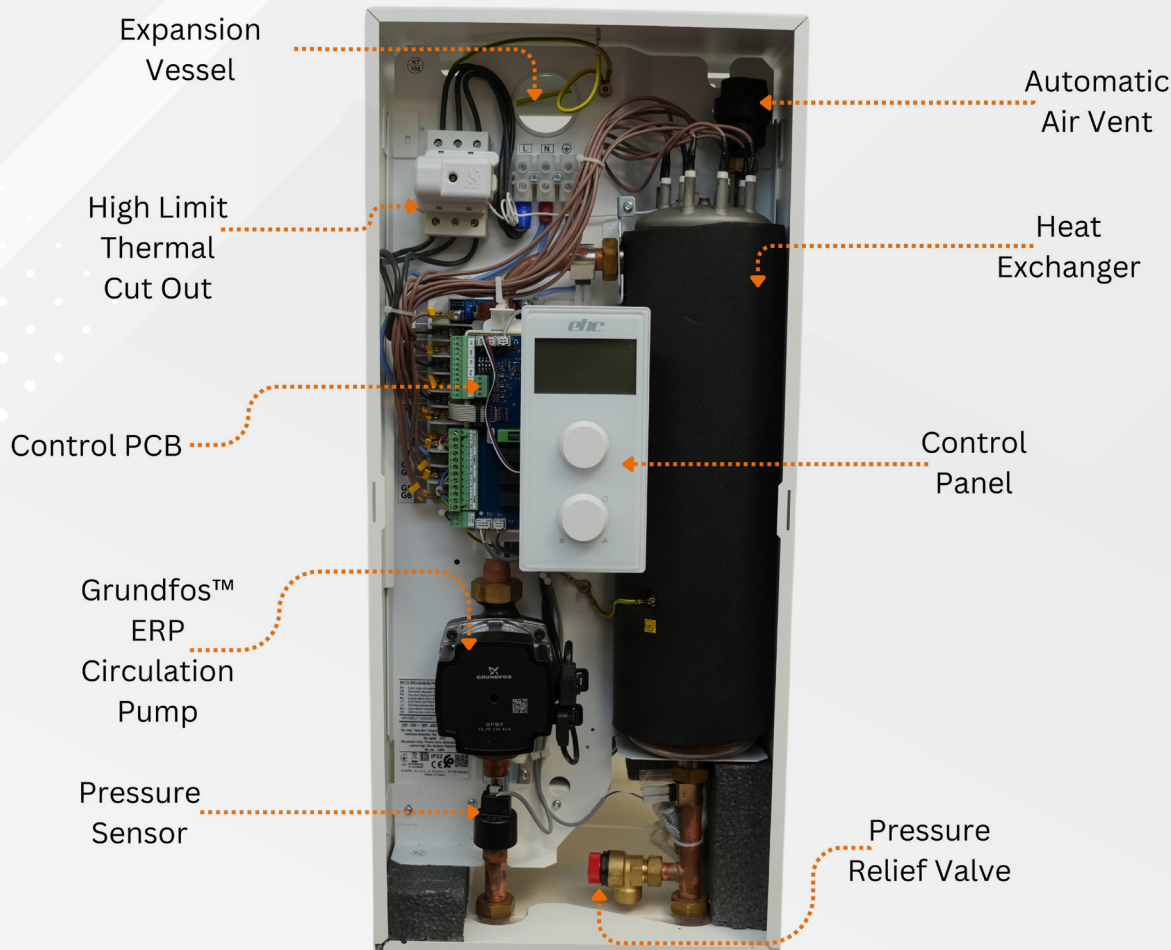

716x316x235mm (height x width x depth) Weight: 20.5kg

CometPV Electric System Boiler

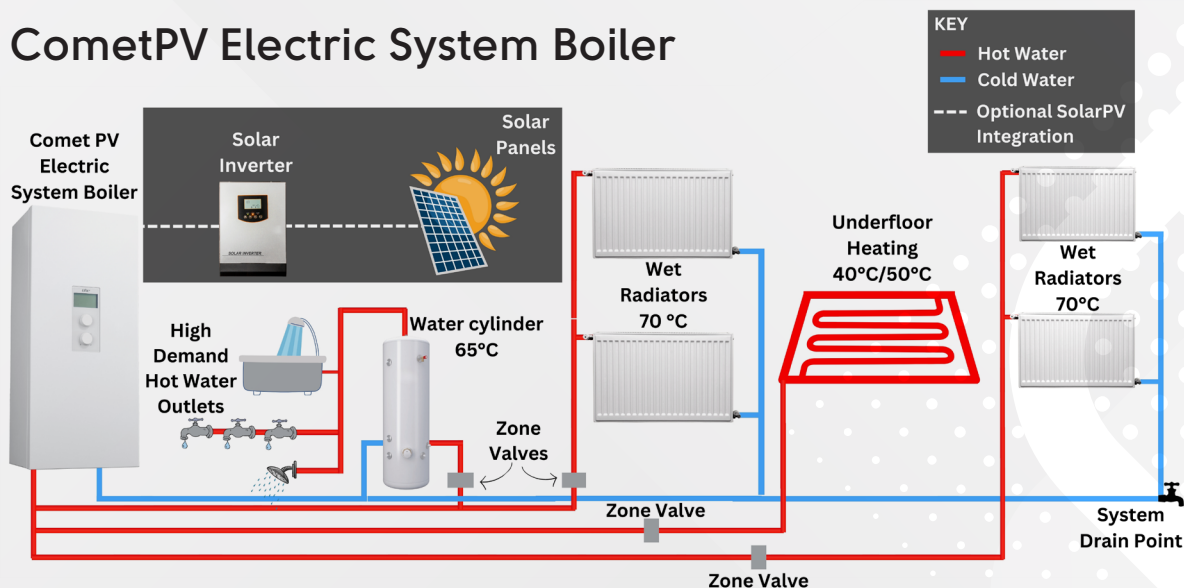

Boiler

2 / 4 / 6 / 8

Rated power	kW	2	4	6	8
Rated voltage		230V~			
Rated current	A	8,7	17,4	26,1	34,8
Min. power supply cable cross-section	mm ²	2,5		4	6
Max. power supply cable cross-section	mm ²	16			
Max. allowed network impedance	Ω		0,27	0,17	0,15

Boiler

7.2 / 9.6 / 12.0 / 14.4

Rated power	kW	7,2	9,6	12,0	14,4
Rated voltage		240V 1N~			
Rated current	A	30,0	40,0	50,0	60,0
Min. power supply cable cross-section	mm ²	4	6	10	
Max. power supply cable cross-section	mm ²	16			
Max. allowed network impedance	Ω			0,24	0,22

Boiler


12 / 16 / 20 / 24

Rated power	kW	12	16	20	24
Rated voltage		400V 3N~			
Rated current	A	3x17,4	3x23,1	3x28,8	3x34,6
Min. power supply cable cross-section	mm ²	5 x 2,5	5 x 4		5 x 6
Max. power supply cable cross-section	mm ²	5 x 16			
Max. allowed network impedance	Ω			0,27	0,13

Note; Stated cable sizes are the minimum permitted for this appliance. The required cable size for the installation should be calculated by a qualified electrician based on a cable calculation in line with BS7671 considering the cable type selected and the installation method used.



The CometPV system boiler can be integrated with SolarPV if required, but the boiler can also work as a standard electric system boiler.

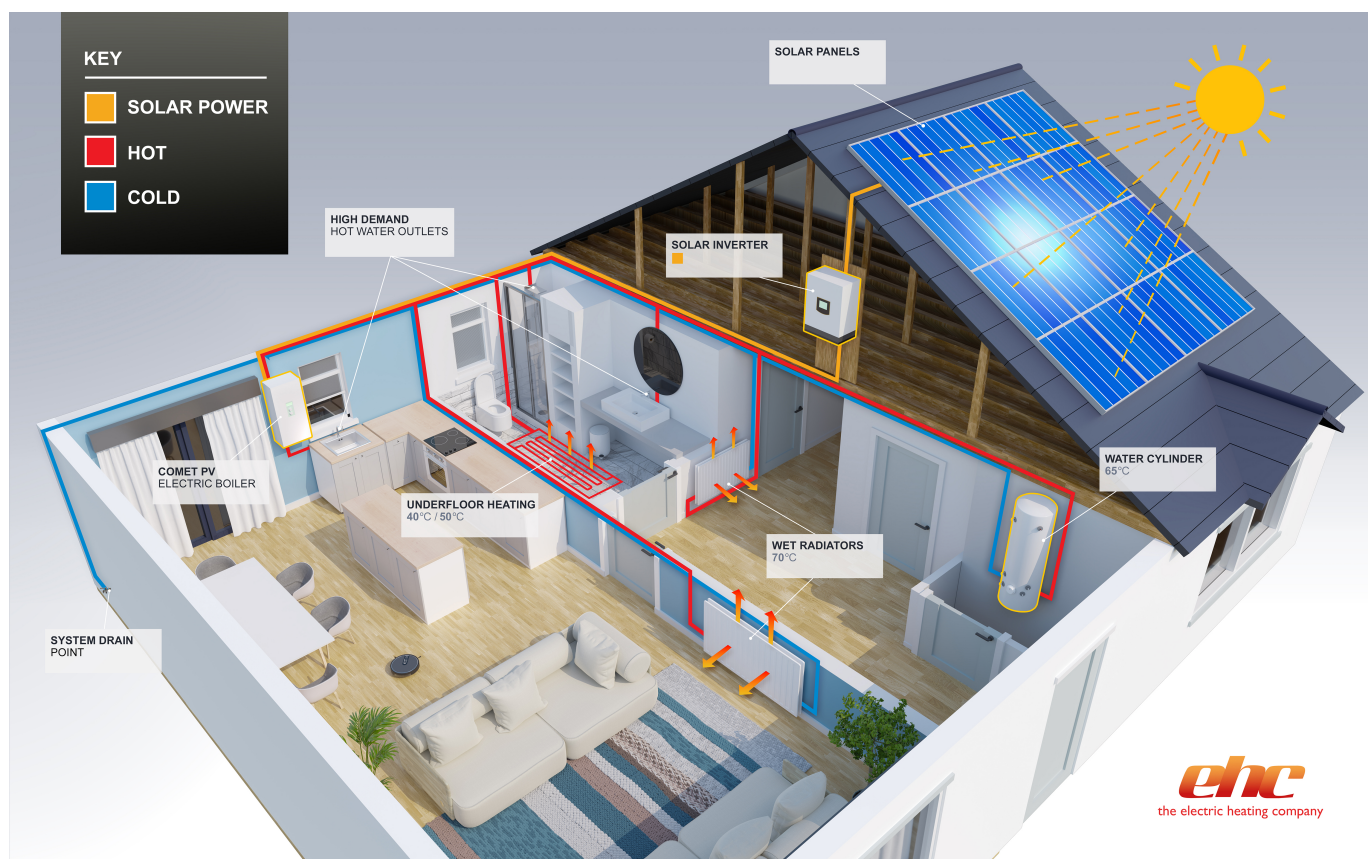

Tel: 01698 820533

Email: info@electric-heatingcompany.co.uk

www.electric-heatingcompany.co.uk

Unit 40, Block 5, Third Road, Blantyre Industrial Estate, Blantyre, Glasgow G72 0UP



Disclaimer - All figures quoted and images used are correct at the time of printing and maybe subject to change