

, ROMAN WAY, LOUTH, LN11 ASKING PRICE £625,000



£7,000 Allowance for Flooring / Carpets *Part Exchange Considered*

TES Property bring to the market this exclusive detached property built by the well known Jim Fairburn Ltd, as part of the Highfields development in Louth, Lincolnshire. The property is ideally nestled in the popular west side of town close to all local amenities.

The property comprises a grand entrance hallway, with two bedrooms to the ground floor, spacious lounge, impressive dining kitchen with sun room, a utility and shower room to the ground floor. The first floor consists of two spacious double bedrooms, both with an en-suite.

Standing on a generous corner plot with front and rear gardens, driveway and garage.

With an allowance in place enabling you to choose your dream kitchen, bathrooms and tiling throughout! Book your viewing in now to reserve this impressive family home.





Location - Louth

The historic market town of Louth; fondly known as the 'Capital of the Wolds' and beautifully positioned in an Area of Outstanding Natural Beauty is approximately 15 miles from the coast, 16 miles from Grimsby and 30 miles from Lincoln.

It has a wealth of local services and amenities to offer. Popular points of interest include the 'people's park' of Hubbard Hills and Westgate Fields, the last remaining Lincolnshire Cattle Market and the spectacular St James' Church, boasting the tallest medieval parish church spire of approx 287 feet /87.6 m. Other features include Louth Golf Course and Kenwick Park Golf Course, Louth Tennis Centre, London Road Sports Pavilion, Riverhead Theatre, Playhouse Cinema, Louth Museum, Kenwick Park Gym and Spa and Meridian Leisure Centre. As well as excellent local schools including King Edward's VI Grammar School, a doctors surgery and a hospital. Louth is particularly well known for its vast array of independent shops, butchers and delicatessens, thrice weekly markets and the New Market Indoor Hall all offering outstanding local produce as well as three supermarkets; Morrisons, Co-Op and Aldi.

School Catchment Area

This property is in the catchment area for many primary schools, including St Michael's Church of England School, Louth Kidgate Primary Academy, North Cockerington Church of England Primary School and Grimoldby Primary School.

As well as 2 secondary schools, Louth Academy & King Edward VI Grammar School.

Specification

Jim Fairburn Ltd have advised that the property will include the following specifications:

Internally:

- Composite front doors, uPVC double glazed windows throughout
- Oak staircases
- Intruder Alarm systems
- £50,000 allowance for Kitchen, bathrooms and tiling (subject to discussions with the developer)
- Ground floor underfloor heating system
- £7,000 allowance for flooring and carpets

Externally:

- Block paved driveway
- Paths and patio areas in Indian Sandstone
- Saxon multi bricks and red clay pantiles

Development

Located within the west side of the popular market town of Louth, this exclusive development is accessed off Meridian View, a popular residential area and is located within close proximity to the town centre and all of its amenities. This sought after development offers a range of exclusive properties, all built to a high specification throughout and include a 10 year warranty.

About the Developer

Jim Fairburn Ltd is a well known building and developer specialist in Louth, established for over 40 years providing quality properties throughout Louth.

A variety of popular developments in Louth such as Highfields, Cullingford Way and many more, all built to a high standard throughout and designed to accommodate all your wants and needs.

Hallway

Spacious hall providing access to the lounge, dining kitchen, both ground floor bedrooms, utility and side entrance. A staircase leads to the first floor landing.

Lounge

17'7" x 17'11"

With feature fireplace and uPVC double glazed window to the front and side.

Dining Kitchen

17'11" x 16'11"

With an allowance in place for you to choose a range of kitchen units. There is ample dining space and opening into the sun room.

Sun Room

14'4" x 13'6"

With uPVC double glazed window to the front and bi-folding door to the rear.

Bedroom

12'2" x 16'4"

With uPVC double glazed window to the front.

Bedroom

12'5" x 12'5"

With uPVC double glazed window to the side.

Ground Floor Shower Room

6'2" x 7'8"

Fitted with a three piece suite consisting of a walk in shower, W.C and wash hand basin.

Side Entrance

9'5" x 8'6"

With uPVC double glazed window and door to the side.

Utility

8'10" x 8'6"

Fitted with a range of units and a uPVC double glazed window and door to the side.

Landing

With access to both first floor bedrooms.

Bedroom

16'4" x 15'6"

With uPVC double glazed windows to the front and doors into the dressing room and en-suite.

Dressing Room

5'8" x 6'10"

En-suite

7'3" x 9'1"

Fitted with a three piece suite consisting of a shower cubicle, W.C and wash hand basin.

Bedroom

17'11" x 13'1"

With uPVC double glazed window to the rear and access into the dressing room.

Dressing Room

4'1" x 7'11"

With door leading into the en-suite.

En-suite

10'4" x 8'3"

Fitted with a four piece suite consisting of a his and hers wash hand basin, shower cubicle, W.C and bath.

Garage

18'8" x 18'3"

With electric door.

Services

Mains electricity, drainage, water and BT are understood to be connected. Central heating is via an Air Source Heat Pump. The agents have not inspected or tested any of the services or service installations and purchasers should rely on their own survey.

Tenure

The property is believed to be freehold and we await solicitors confirmation.

Viewings

By prior appointment through TES Property office in Louth 01507 601633 admin.louth@tes-property.co.uk

Opening Hours

Monday to Friday 9:00am to 5:00pm Saturday 9:00am to 1:00pm






















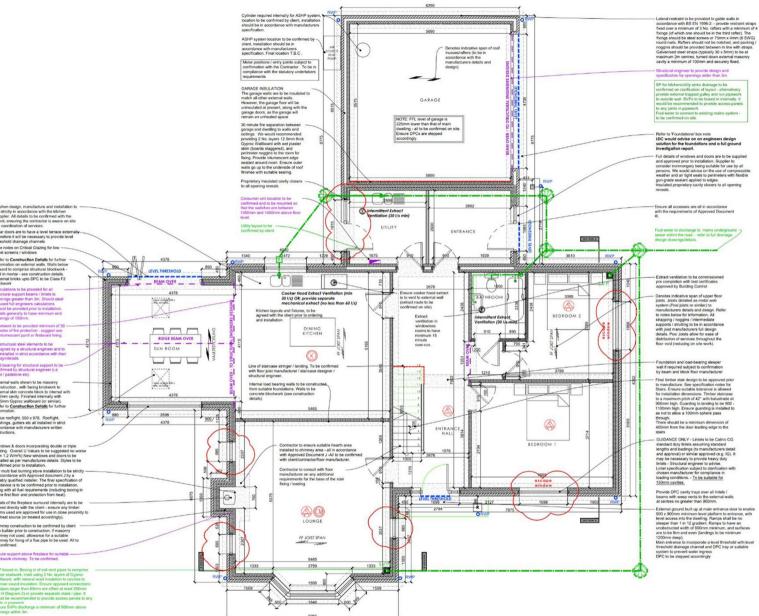

ROUND FLOOR PLAN
ale 1:50

NOTE: All fittings and fictures to be confirmed by the client prior to instate allow coordination with the contractor

Confinency information footwork walls - refer to constitution datala.

Lostificacing Alexandr ordered blockwork walls - refer to constitution datala.

Lostificacing Alexandr ordered blockwork walls - refer to constitution datala. Non load beering internal walls on insulation min, 40dB Fire Alaem system, for a benefing with no finor level above 4 furn from ground and no finor greater than 200m; it has provided in accordance with the contraction greater than 200m; it has provided in accordance with the contraction of the co GF Internal Area : 187m FF Internal Area : 81m Total : 268m

GROUND PLOOR & RADON PROTECTION

Should beging or suspended floory to

MOVEMENT 201NTS (87 where required) M.J. Provide vertical movement pairs to 85 9522 st 1 and 22 in long straight num of majoring at 15 occurrent in bischools and first inbodewise. Spacing of pixel designs of the second of the second of the second of the second of the length of the wall and structure state and build may some procedure. His joint with fleatile master flees at 85 and 56 to 46 per 61 90 move the backing sealant (sciones to 85 5050 or polyvulpside to 85 4254). Selfer to structure!

Solder County (Los 1004) Sub for overlistion to be provided to active e rate of 500mm/limf floor area OR 1500mm/lim not d'external wall (enhútheurs la greater). Subfoor vois subject to engineers floundation design (interiment 150mm, Enoure walls below ground floor FFL, where necessary incorporate vertifiatries to allow for cross floor of vertifiation.

Telescopic vents should be installed at maximum 2m cit with vents positioned no more trun 450mm from the ends of walls (in accordance with NHBC recommendations). Through well vents may be used where ground levels permit.

WATE STAGE & DECCHARGE WATE

WATE STAGE IN DECCHARGE WATE

A STAGE STAGE IN DECCHARGE WATE

A STAGE STAGE IN DECCHARGE STAGE

A STAGE STAGE IN DECCHARGE STAGE

A STAGE STAGE STAGE STAGE

A STAGE STAGE STAGE

A STAGE STAGE STAGE

BOTH STAGE STAGE

BOTH STAGE STAGE

BOTH STAGE

BOTH

FOUNDATIONS NOTE

LDC would advise that ground investigation, or as a minimum soil testing, is

FORMER TOTAL STORY

CONTROLLED TO ANY PROPERTY OF THE STORY OF THE STO

Bathroom should have an outward opening door for use by all persons

TIREST SUCCES (COSTS)

Find devide of the find project shall be confirmed within the Manufacturer design and outsuitablems, coins noted are metid well (e.g. poor / mor) position (COST and as leading outsides are not before agent from different media and the confirmed are not to the confirmed and the confirmed are not to the confirmed and the confirmed are not to the confirmed and the confirmed are not confirmed and the confirmed and the confirmed are not confirmed and the con

LDC should be informed by of any necessary changes to conform to external specifications.

will be required as descrit Document F1:

AMERICAN TECHNICATION (MATERIAL PROTECTION AND APPLICATION OF THE AMERICAN PROTECTION AND APPLICATION OF THE AMERICAN PROTECTION AND APPLICATION OF THE AMERICAN PROTECTION AND APPLICATION APPLICATION AND APPLICATION APPLICATION AND APPLICATION APPLIC

Denotes automatic Smoke Detector (Optical to circurate areas; Ionisation or Optical to other rooms)

Denotes automatic heat detector (to kitchen areas & living areas using log burners)

RWPO rainwater pipe to discharge into a trapped galley with grating

ammeter pain to discharige into a larged garry afth great war and the second free to provide level threshold to do NOTE. Her surface water to be connected to new sookways in occordonce will be 35 M 36 (wider to per

Double in importion chamber improve with access over - invert to be determined on site.

If you've in the invertigation of the invertigation of the internal SVP's to be bossed in internal SVP's to be bossed in 35-50mm above ground places's pipework.

REQUESTANCE (1-6. Windows REQUESTANCE) (1-6. Windows Whatesome water expoly to be provided by the foul water expoly, undertake Whatesome water expoly to be provided by the foul water expoly, undertake the first the provided by the first the condition of an authorise or and \$4.00 to \$1.00 t

INTERNAL DOORS

All Internal Ground Floor doors shown as 910 x 2100mm struckaral opening
Frest foor internal doors generally 910 x 2100mm struckaral opening unless
otherwise shown in the plant or species of
boor styles, tronnovigery, excititaves size and skyle should all be confirmed
with the client prior to obsering and installations.

STRUCTURAL STEEL WORK / SUPPORT
Any should sheel determine and to be electly in accordance with the
Shouland liberal determines and to be electly in accordance with the
Shouland Engineer and Steeleum Ferdinations details are specification.
Steeleum shell have a minimum of 50 minutes protection from the (through
justice-board livings or inturnescent pains).
SUARRINNG
SUARRINNG

GUARDING

Subject to the final window designs and opening mechanisms it may be mecessary to provide guarding for protection against failing. 1.1m high existentially, or 0.8-1.1m high residentially, short protection against failing. 1.1m high residentially short provides a continued to the design of behalds see should be determined in accordance with 65 6306-1; clisuse 10. Manufacturer to provide confirmation.

IMPROVID DOCUMENT FAIT - ENCIREAL SWITT

All delicrois institutions are to comply with LE. Writing regulations and require an appropriate BTR911 electrical installation certificate issued, in social to saisely, Aproved Document PC (Editional Switty) and grows the complete and prove the complete to do so. Electrical socials and lighting witches to be position as zone 450mm above FFL, and 200mm above FFL an

Consumer units are to be mounted so that the settches are between 1350mm and 1450mm above 5oor level. Consideration to be given to ensure compliance with all other statutory requirements relating to consumer unit position such as British and European standards.

The main principle in limiting ar leakage from the building is to privide a continuous barrier to air movement around the valuels space that is in own the thin which of the thermal installation layer. The develop is to be build to achieve good levels of airrightness. Pits will be achieved through use of enterwarders of originations of airrightness. This will be achieved through the original enterwarders of originations and originations of airrightness or of originations of airrightness originations are also as a second control or destallation.

Air sightness testing will need to be carried out on the building prior to brought into use.

INSERTION INVESTIGATION OF THE PROPERTY OF THE

costs should NOT be noticed;

CERTICAL CLASSING A SPREVIOUS DOC Q

Wholese Closer, George see to be should never with a confinite with the COST and of Parasite for Caseing bit is accordance with 100 COST and of Code of Parasite for Caseing bit of the Cost and Cost an

100-110mm below ground plantic pi P Trap gulley discharging to drains

Denotes 30 minute fire separation

DRAF NOTTO REDISTRIBUT

Subject to Structural Engineers D

Subject to Full Planning App

Subject to Building Control App

Subject to SAP Energy Calcula




Residential Developme Land to the North of Julian Bower, Louth Lincs.

June 2024 Plot 13 Ground Floor Plan

DIEG STATUS BUILDING REGULATION

NUMBER LDC3861-BR-33

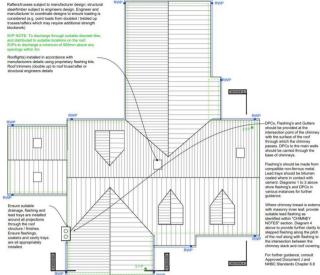

ROOF PLAN

scale 1:100

Joints shall be sealed with fire cement, refractory mortar or otherwise installed as per the manufacturers suidance.

For Further guidance consult Approved Document J Paragraphs 1.27 & 1.28

Specia befores the lower and macroy shall NOI be filled with ordinary mortar, instead a weak. receiving more the volled to wared, such as 1. One part enterary Purificant cement to 20 parts suitable lightweight expended day aggregate, microwally settled. All controls the parts Vermicalitate, or, 1. One part enterary Purificant cements to 10 parts Purificate, or, Comparts efforting Purificant cements to 10 parts Purificate.



Subject to Full Planning Approval

ubject to Building Control Approval

Subject to SAP Energy Calculations



Lines Design Consultancy 12 Vickets Lane

Residential Development, Land to the North of Julian Bower, Louth Lincs.

DRG STATUS BUILDING REGULATIONS
DRAWING LDC3861-BR-34

June 2024 Plot 13 First Floor & Roof Plan 1:50 / 1:100

ORIGINAL SIZE | A 1

Provide Code 3 lead soakers and Code 4 stepped flashings. If and where required provide Code 6 lead front agron flashings and to back outliers.

Flue System to comprise

Raft Support Lintels - Forters or similar

RIST SEGROT LIMIT. Fortiers or unitate
 RIST Limit Element Flower (1974) Charges or similar
 RIST Limit Element Flower (1974) Charges or unitate
 RIST Limit Flower (1974) Charges or unitate
 Triben Internal Charges (1974) Charges (1974) Charges (1974)
 Triben Internal Charges (1974) Charges (1974) Charges (1974)
 Triben Internal Charges (1974)
 Triben Internal Charges (1974)
 Triben Internal Charges (1974)


Flue system to utilise 175mm dameter adaptor to vibrous flue where necessary, as immediate


Bespoke Cast stone units to top of chimney bedded in 1.3 morter and (frost resistant) laid on high bond strength DPC.


Where a hearth, flequiace, flue or essential to the correct appliance and use of these facilities should be permanently posted in the building. A provide a nutside plate as shown adjacent in Clargem 16. Such plate should be convey the following the should be convey the flue that the delegacy of the flue, the plate and size of flue, manufacture and residation date.

August Sample rates park for such card has been considered from the considered from th

Special Control of the Control of th

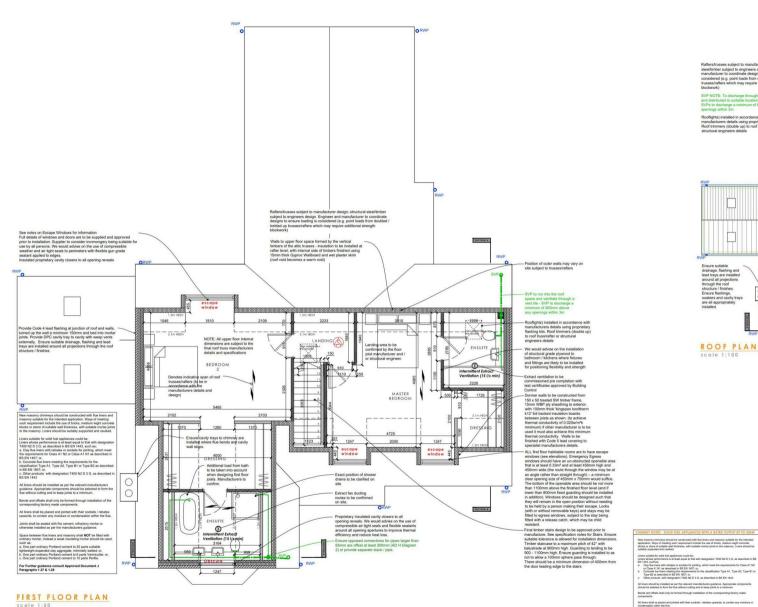

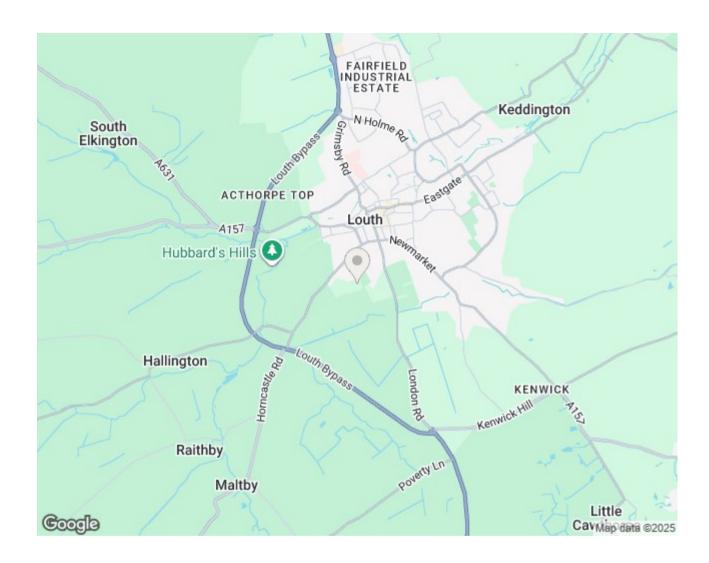





To the agents knowledge these particulars have been prepared with information provided by the current owner and following the agents inspection, intended to give a fair and reliable description of the property, but no responsibility for any inaccuracy or errors can be accepted by the agent and do not constitute to an offer or contract. The agent has not tested any services or appliances referred to in these particulars, and any purchaser is advised to satisfy themselves as to the working order as or condition to the appliances. all measurements within these particulars are approximate.